

Fire Resistant Safes

VALBERG

series: **FRS**
grade: **LFS 60P**

YOU GOT MORE



FRS 30



FRS 133



Optional wheels available


Model										
FRS 30	296	430	365	188	326	236	-	tray	31	15
FRS 32	315	445	425	207	341	296	-	tray	38	21
FRS 49	490	361	425	382	257	296	-	1+tray	46	29
FRS 51	510	445	425	402	341	296	-	1+tray	54	41
FRS 66	653	485	450	467	346	301	85x343	1	75	49
FRS 67	713	485	450	527	346	301	85x343	1	86	49
FRS 75	792	485	450	607	346	301	85x343	1	103	64/8
FRS 93	972	565	450	786	426	301	85x423	2	138	98/10
FRS 120	1249	711	580	1034	546	418	135x515	2	290	236/26
FRS 133	1363	711	580	1170	546	418	135x515	2	332	267/26
FRS 165	1700	711	580	1487	546	418	135x515	3	390	340/26




Digital lock + Key lock



Digital lock + Thumbturn




Digital lock + Key lock



Digital lock + Handle

The outer depth is given without the handle and the lock.

The outer height is given without wheels. The height with wheels is +20 mm

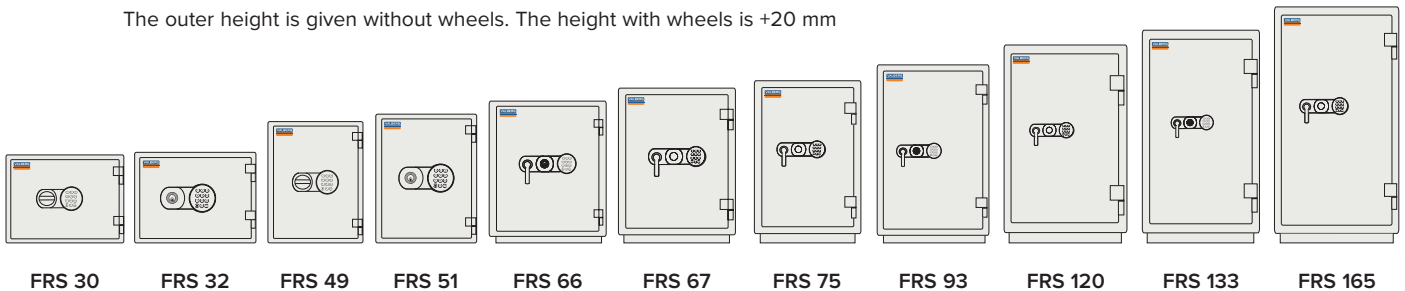

FRS 30

FRS 32

FRS 49

FRS 51

FRS 66

FRS 67

FRS 75

FRS 93

FRS 120

FRS 133

FRS 165

- Fire resistance – LFS 60P according to EN 15659.
- The safe body and door are manufactured with two inter-welded walls that are filled with fire resistant concrete.
- Dead bolts on hinge side
- The thickness of wall 50 mm.

- The thickness of door 95 mm.
- Pull out tray or drawer included.
- Anchoring to the floor.
- Color: RAL 7035 (light grey), also available in RAL 7024 (grey graphite).

Innovative solutions for series FRS

VALBERG


series: **FRS**



Dead bolts
on hinge side



Pull out tray

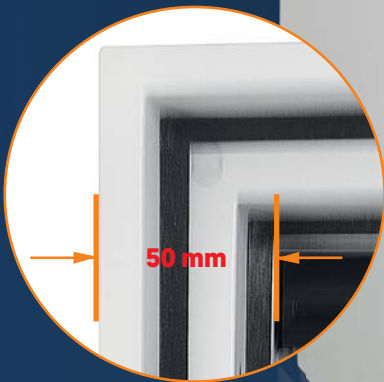

Multilayered wall
structure, thickness
of 50 mm



Pull out drawer



Multilayered door
structure, thickness
of 95 mm

